

OKW30



More Flexible, More Durable



Agriculture



Demolish



Forestry



Engineering



Landscaping



Pipeline



Construction site



Standard configuration: ● Cab ● Air conditioning ● Steel crawler tracks ● Retractable chassis
● High and low speed traveling motors

OKW30 Product Introduction

Superior performance - more flexibility



The OKW30 offers impressive versatility, and depending on the specific job needs, the included tools can all be used for greater versatility and superior performance.

Superior performance - more durable



Robust machine width

When the work is challenging, please launch the OKW30, it is a robust excavator, the body width of 1350mm provides all the stability needed to complete any task, without compromising power and performance, allowing You'll be able to get in, dig in, and get out again easily and efficiently, while being narrow enough to operate where space is limited.



Four functions operate simultaneously

The performance of the OKW30 is anything but compact. When the boom, stick, bucket and swing need to operate simultaneously, two variable displacement pumps will distribute precise oil flow to each actuator based on the lever stroke, allowing for continuous high-performance digging and dozing.

OKW30 Product Introduction

More comfortable and safe

Comfortable cab

The okw30 has the largest cab in its class, offering generous footwells for increased comfort, as well as tall, wide doors for faster and easier entry and exit from the cab.




Secure tie-down points

Four tie-down points are mounted on the nacelle for added security and easier transport.



More convenient--easy to maintain

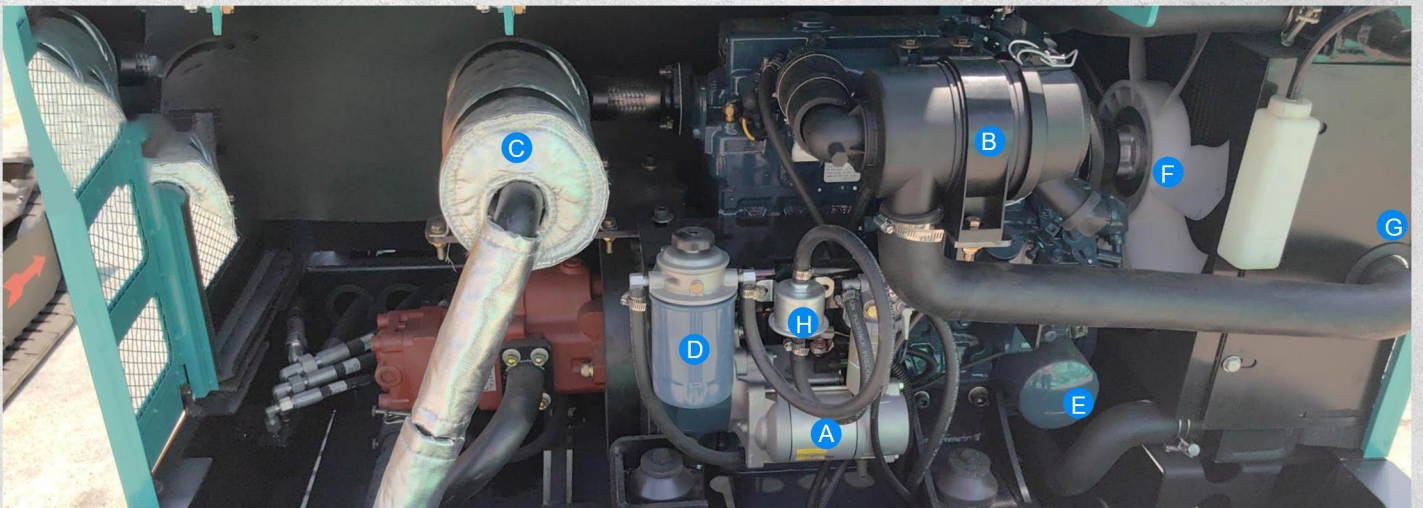

- A. Launcher B. Air cleaner C. Silencer D. Fuel filter E. Water separator
F. Radiator G. Oil cooler H. Oil filter

Fully opening access doors and hood provide quick and easy access to all inspection and maintenance areas of the engine.

Model		Okw30
Performance parameter	Name	CrawlerExcavator
	Bucketcapacity	0.1m³
	Engine	Laidong,3TE30,22.1Kw
	Walkingspeed	2.7Km/h
	Rotationspeed	10r/min
	Totallength	4180mm
	Totalwidt	1350mm
	Totalheigh	2200mm
	Crawlerlength	2000mm
	Crawlerwidth	230mm
	Bodywidth	1350mm
	Maximumdiggingheigh	3900mm
	Maximumdumpingheight	2600mm
	Maximumdiggingdepth	2500mm
	Maximumdiggingradius	4040mm
	Platformclearancetoground	458mm
	Swingangle	360°
	Climbinggradient	30°

