

OKWB5



More Flexible, More Durable



Agriculture



Demolish



Forestry



Engineering



Landscaping



Pipeline




Construction site



Standard configuration: • Cab • Air conditioning • Steel crawler tracks • Retractable chassis
• High and low speed traveling motors

OKW35 Product Introduction

Superior performance -- more flexible

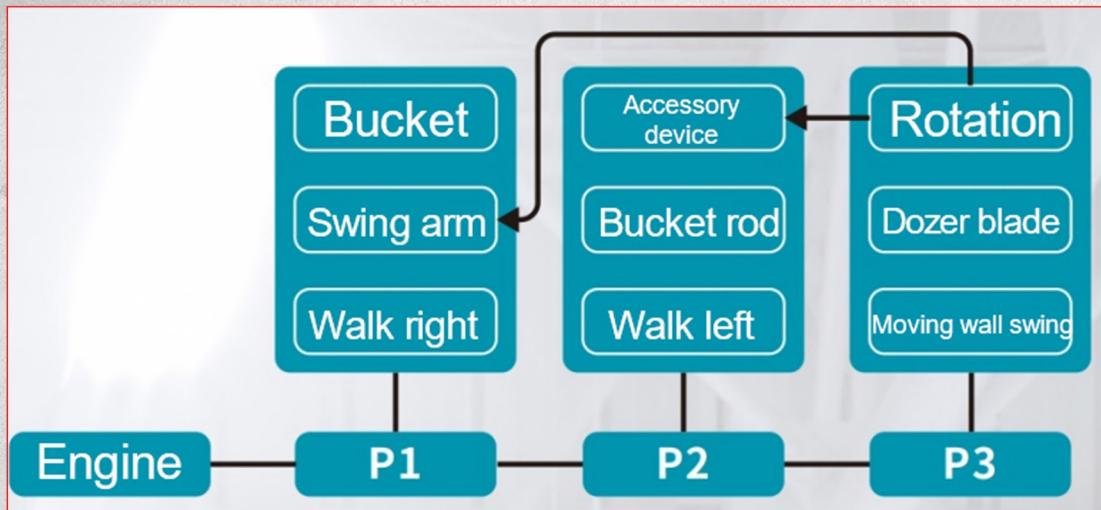

- H·M·S hydraulic system, the boom, stick, and swing adopt independent three-pump systems, equipped with control valves and variable pumps with a wider control range. Fast, smooth and powerful work is realized.
- Equipped with a straight forward circuit, when walking, even if the boom is operated, there will be no S-shape and the speed will not change, so stable straight driving can be achieved.
- Four linkage can be realized. Through the 3-pump hydraulic system, the bucket, boom, stick and rotation can be operated simultaneously. Loading operations such as dump trucks are also quick and smooth.

Superior performance - more durable



Strong digging force

OKW35 can provide a bucket digging force of 15KN. Its powerful and well-balanced stick and bucket allow operators to dig quickly, deeper and more efficiently, delivering power and outstanding stability even in the toughest conditions.




Two-piece hose design

The okw35's innovative dozer two-piece hose design reduces hose replacement time by nearly 60% compared to non-coupling types. This design virtually eliminates the need to enter the machine for maintenance.

OKW35 Product Introduction

More comfortable and safe

Diagnostics monitor the condition of your machine and automatically alert you with warning lights in the event of an emergency, such as overheating, hydraulic issues, or a low battery.

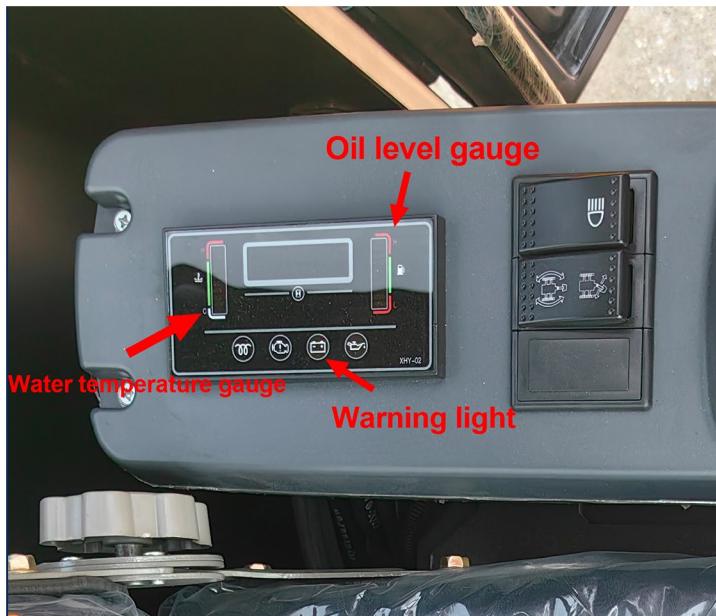

The ultra-comfortable reclining suspension seat helps you work longer with less stress and fatigue.



More convenient--easy to maintain



- A. Launcher B. Air cleaner C. Silencer D. Fuel filter E. Water separator
- F. Radiator G. Oil cooler H. Oil filter

Fully opening access doors and hood provide quick and easy access to all inspection and maintenance areas of the engine.

Specifications

Model	Okw35
Performance parameter	Name CrawlerExcavator
	Bucketcapacity 0.1m ³
	Engine Xinchai,490,36.8Kw
	Walkingspeed 2.7Km/h
	Rotationspeed 10r/min
	Totallength 4180mm
	Totalwidt 1500mm
	Totalheight 2200mm
	Crawlerlength 2300mm
	Crawlerwidth 250mm
	Bodywidth 1500mm
	Maximumdiggingheight 3900mm
	Maximumdumpingheight 2600mm
	Maximumdiggingdepth 2500mm
	Maximumdiggingradius 4040mm
	Platformclearancetoground 458mm
	Swingangle 360°
	Climbinggradient 30°

